

# DuPont™ Delrin® FG311DP NC010

## ACETAL RESIN

### Product Information

Common features of Delrin® acetal resins include mechanical and physical properties such as high mechanical strength and rigidity, excellent fatigue and impact resistance, as well as resistance to moisture, gasoline, lubricants, solvents, and many other neutral chemicals. Delrin® acetal resins also have excellent dimensional stability and good electrical insulating characteristics. They are naturally resilient, self-lubricating, and available in a variety of colors and speciality grades.

Delrin® acetal resin typically is used in demanding applications in the automotive, domestic appliances, sports, industrial engineering, electronics, and consumer goods industries.

**Delrin® FG311DP is a medium-high viscosity acetal homopolymer with enhanced crystallization for faster cycle times and excellent creep and fatigue resistance. It has improved thermal stability, excellent dimensional stability, low warpage and fewer voids. It has been developed for applications in contact with food.**

### FOOD CONTACT

This product is manufactured according to Good Manufacturing Practice (GMP) principles and generally accepted in food contact applications in Europe and the USA when meeting applicable use conditions. For details, individual compliance statements are available from your DuPont representative.

General information			
	Value	Unit	Test Standard
Resin Identification	POM	-	ISO 1043
Part Marking Code	POM	-	ISO 11469
Rheological properties			
	Value	Unit	Test Standard
Melt volume-flow rate	6	cm <sup>3</sup> /10min	ISO 1133
Temperature	190	°C	ISO 1133
Load	2.16	kg	ISO 1133
Melt mass-flow rate	7	g/10min	ISO 1133
Molding shrinkage, parallel	1.9	%	ISO 294-4, 2577
Molding shrinkage, normal	1.8	%	ISO 294-4, 2577
Mechanical properties			
	Value	Unit	Test Standard
Tensile Modulus	3300	MPa	ISO 527-1/-2
Yield stress	74	MPa	ISO 527-1/-2
Yield strain	15	%	ISO 527-1/-2
Nominal strain at break	35	%	ISO 527-1/-2
Flexural Modulus	3100	MPa	ISO 178
Flexural Stress at 3.5%	86	MPa	ISO 178
Charpy impact strength			ISO 179/1eU
73°F	300	kJ/m <sup>2</sup>	
-22°F	250	kJ/m <sup>2</sup>	
Charpy notched impact strength			ISO 179/1eA
73°F	9	kJ/m <sup>2</sup>	
-22°F	8	kJ/m <sup>2</sup>	
Izod notched impact strength			ISO 180/1A
73°F	10	kJ/m <sup>2</sup>	
-40°F	8	kJ/m <sup>2</sup>	
Thermal properties			
	Value	Unit	Test Standard
Melting temperature, 18°F/min	178	°C	ISO 11357-1/-3
Temp. of deflection under load			ISO 75-1/-2
260 psi	103	°C	
65 psi	165	°C	
Vicat softening temperature, 90°F/h, 11 lbf	160	°C	ISO 306
Coeff. of linear therm. expansion, parallel	110	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal	110	E-6/K	ISO 11359-1/-2
RTI, electrical			UL 746B
30mil	50	°C	
60mil	110	°C	
120mil	110	°C	

Revised: 2017-01-19

Page: 1 of 7

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

#### North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

#### Asia Pacific

Tel: +81 3 5521 8600

#### Europe/Middle East/Africa

Tel: +41 22 717 51 11



Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.

# DuPont™ Delrin® FG311DP NC010

## ACETAL RESIN

RTI, impact			UL 746B
30mil	50	°C	
60mil	85	°C	
120mil	90	°C	
RTI, strength			UL 746B
30mil	50	°C	
60mil	90	°C	
120mil	95	°C	
<b>Flammability</b>	<b>Value</b>	<b>Unit</b>	<b>Test Standard</b>
Burning Behav. at 60mil nom. thickn.	HB	class	IEC 60695-11-10
Thickness tested	1.5	mm	IEC 60695-11-10
UL recognition	yes	-	UL 94
Burning Behav. at thickness h	HB	class	IEC 60695-11-10
Thickness tested	0.75	mm	IEC 60695-11-10
UL recognition	yes	-	UL 94
<b>Other properties</b>	<b>Value</b>	<b>Unit</b>	<b>Test Standard</b>
Humidity absorption, 80mil	0.2	%	Sim. to ISO 62
Water absorption, 80mil	0.9	%	Sim. to ISO 62
Density	1420	kg/m <sup>3</sup>	ISO 1183
<b>VDA Properties</b>	<b>Value</b>	<b>Unit</b>	<b>Test Standard</b>
Emissions	<8	mg/kg	VDA 275
Fogging, G-value (condensate)	0.4	mg	ISO 6452
<b>Injection</b>	<b>Value</b>	<b>Unit</b>	<b>Test Standard</b>
Drying Recommended	yes	-	-
Drying Temperature	80	°C	-
Drying Time, Dehumidified Dryer	2 - 4	h	-
Processing Moisture Content	≤0.2	%	-
Melt Temperature Optimum	215	°C	-
Min. melt temperature	210	°C	-
Max. melt temperature	220	°C	-
Mold Temperature Optimum	90	°C	-
Min. mold temperature	80	°C	-
Max. mold temperature	100	°C	-
Hold pressure range	80 - 100	MPa	-
Hold pressure time	7.5	s/mm	-
Annealing time, optional	30	min/mm	-
Annealing temperature	160	°C	-
<b>Extrusion</b>	<b>Value</b>	<b>Unit</b>	<b>Test Standard</b>
Drying Temperature	75 - 85	°C	-
Drying Time, Dehumidified Dryer	2 - 4	h	-
Processing Moisture Content	≤0.2	%	-
Melt Temperature Optimum	200	°C	-
Melt Temperature Range	195 - 205	°C	-

### Characteristics

Processing	<ul style="list-style-type: none"> <li>Injection Molding</li> <li>Film Extrusion</li> </ul>	<ul style="list-style-type: none"> <li>Profile Extrusion</li> <li>Sheet Extrusion</li> </ul>	<ul style="list-style-type: none"> <li>Other Extrusion</li> </ul>
Delivery form	<ul style="list-style-type: none"> <li>Pellets</li> </ul>		
Additives	<ul style="list-style-type: none"> <li>Lubricants</li> </ul>	<ul style="list-style-type: none"> <li>Release agent</li> </ul>	
Regional Availability	<ul style="list-style-type: none"> <li>North America</li> <li>Europe</li> </ul>	<ul style="list-style-type: none"> <li>Asia Pacific</li> <li>South and Central America</li> </ul>	<ul style="list-style-type: none"> <li>Near East/Africa</li> <li>Global</li> </ul>

### Processing Texts

#### Injection molding

Drying is recommended, but not necessary for newly opened packaging stored in a dry location.

Revised: 2017-01-19

Page: 2 of 7

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

#### North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

#### Asia Pacific

Tel: +81 3 5521 8600

#### Europe/Middle East/Africa

Tel: +41 22 717 51 11



Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.

# DuPont™ Delrin® FG311DP NC010

## ACETAL RESIN

Follow the drying guidelines above in the following cases:

- If moisture is above the Processing Moisture Content recommendation,
- When a resin container is damaged,
- When the material is not properly stored in a dry place at room temperature, or
- When packaging stays open for a significant time.

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

### North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

### Asia Pacific

Tel: +81 3 5521 8600

### Europe/Middle East/Africa

Tel: +41 22 717 51 11




# DuPont™ Delrin® FG311DP NC010

## ACETAL RESIN

Diagrams

Stress-strain

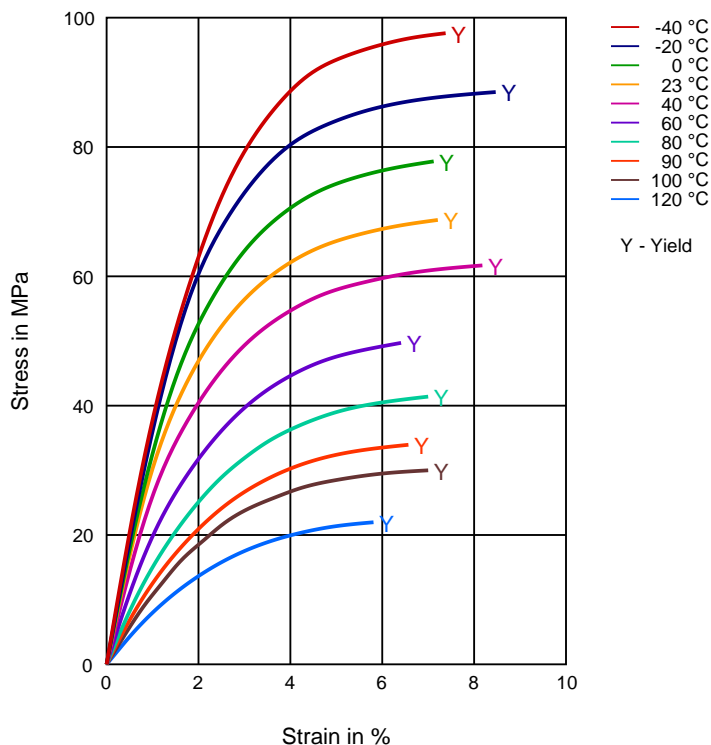

Revised: 2017-01-19

Page: 4 of 7

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

### North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

### Asia Pacific

Tel: +81 3 5521 8600

### Europe/Middle East/Africa

Tel: +41 22 717 51 11


Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.



# DuPont™ Delrin® FG311DP NC010

## ACETAL RESIN

Secant modulus-strain

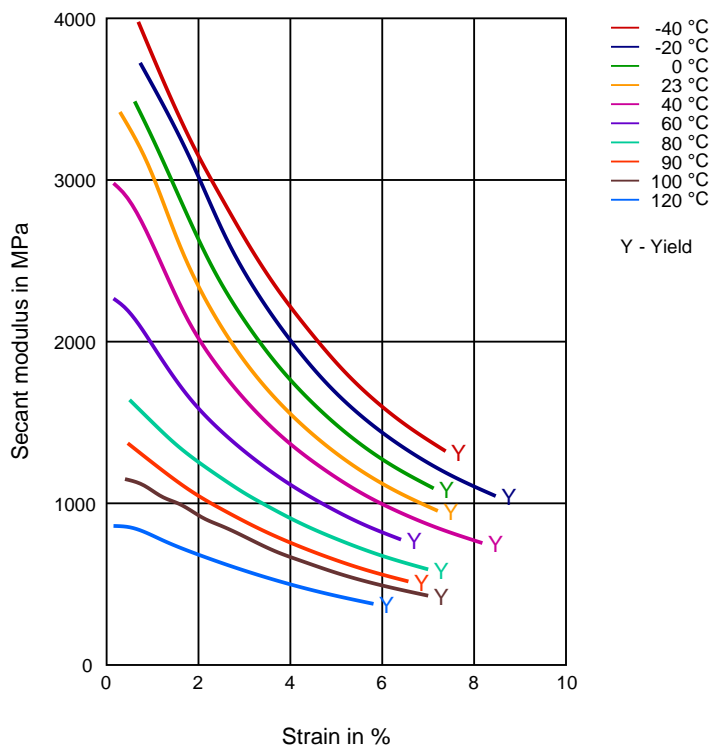

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

### North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

### Asia Pacific

Tel: +81 3 5521 8600

### Europe/Middle East/Africa

Tel: +41 22 717 51 11



# DuPont™ Delrin® FG311DP NC010

## ACETAL RESIN

### Chemical Media Resistance

#### Acids

- ✓ Acetic Acid (5% by mass) (23 °C)
- ✗ Citric Acid solution (10% by mass) (23 °C)
- ✗ Lactic Acid (10% by mass) (23 °C)
- ✗ Hydrochloric Acid (36% by mass) (23 °C)
- ✗ Nitric Acid (40% by mass) (23 °C)
- ✗ Sulfuric Acid (38% by mass) (23 °C)
- ✗ Sulfuric Acid (5% by mass) (23 °C)
- ✗ Chromic Acid solution (40% by mass) (23 °C)

#### Bases

- ✗ Sodium Hydroxide solution (35% by mass) (23 °C)
- ✗ Sodium Hydroxide solution (1% by mass) (23 °C)
- ✗ Ammonium Hydroxide solution (10% by mass) (23 °C)

#### Alcohols

- ✓ Isopropyl alcohol (23 °C)
- ✓ Methanol (23 °C)
- ✓ Ethanol (23 °C)

#### Hydrocarbons

- ✓ n-Hexane (23 °C)
- ✓ Toluene (23 °C)
- ✓ iso-Octane (23 °C)

#### Ketones

- ✓ Acetone (23 °C)

#### Ethers

- ✓ Diethyl ether (23 °C)

#### Mineral oils

- ✓ SAE 10W40 multigrade motor oil (23 °C)
- ✗ SAE 10W40 multigrade motor oil (130 °C)
- ✗ SAE 80/90 hypoid-gear oil (130 °C)
- ✓ Insulating Oil (23 °C)

#### Standard Fuels

- ✓ ISO 1817 Liquid 1 - E5 (60 °C)
- ✓ ISO 1817 Liquid 2 - M15E4 (60 °C)
- ✓ ISO 1817 Liquid 3 - M3E7 (60 °C)
- ✓ ISO 1817 Liquid 4 - M15 (60 °C)
- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C) (23 °C)
- ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23 °C)

Revised: 2017-01-19

Page: 6 of 7

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

#### North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

#### Asia Pacific

Tel: +81 3 5521 8600

#### Europe/Middle East/Africa

Tel: +41 22 717 51 11



Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.

# DuPont™ Delrin® FG311DP NC010

## ACETAL RESIN

- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (23°C)
- ✗ Diesel fuel (pref. ISO 1817 Liquid F) (90°C)
- ✗ Diesel fuel (pref. ISO 1817 Liquid F) (>90°C)

### Salt solutions

- ✓ Sodium Chloride solution (10% by mass) (23°C)
- ✗ Sodium Hypochlorite solution (10% by mass) (23°C)
- ✗ Sodium Carbonate solution (20% by mass) (23°C)
- ✗ Sodium Carbonate solution (2% by mass) (23°C)
- ✗ Zinc Chloride solution (50% by mass) (23°C)

### Other

- ✓ Ethyl Acetate (23°C)
- ✗ Hydrogen peroxide (23°C)
- ✗ DOT No. 4 Brake fluid (130°C)
- ✗ Ethylene Glycol (50% by mass) in water (108°C)
- ✓ 1% nonylphenoxy-polyethyleneoxy ethanol in water (23°C)
- ✓ 50% Oleic acid + 50% Olive Oil (23°C)
- ✓ Water (23°C)
- ✗ Water (90°C)
- ✗ Phenol solution (5% by mass) (23°C)

#### Symbols used:

✓ possibly resistant

Defined as: Supplier has sufficient indication that contact with chemical can be potentially accepted under the intended use conditions and expected service life. Criteria for assessment have to be indicated (e.g. surface aspect, volume change, property change).

✗ not recommended - see explanation

Defined as: Not recommended for general use. However, short-term exposure under certain restricted conditions could be acceptable (e.g. fast cleaning with thorough rinsing, spills, wiping, vapor exposure).

Contact DuPont for Material Safety Data Sheet, general guides and/or additional information about ventilation, handling, purging, drying, etc. ISO Mechanical properties measured at 160 mil (Hytrel® measured at 80 mil), IEC Electrical properties measured at 80 mil, all ASTM properties measured at 120 mil, and test temperatures are 73°F unless otherwise stated.

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable and falls within the normal range of properties. It is intended for use by persons having technical skill, at their own discretion and risk. This data should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents. Caution: Do not use in medical applications involving permanent implantation in the human body. For other medical applications, discuss with your DuPont customer representative and read Medical Caution H-50103-5.

Copyright © 2017 DuPont or its affiliates. All Rights Reserved. The DuPont Oval Logo, DuPont™, The miracles of science™ and all products denoted with ® or ™ are registered trademarks or trademarks of E.I. du Pont de Nemours and Company or its affiliates.

Revised: 2017-01-19

Page: 7 of 7

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

#### North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

#### Asia Pacific

Tel: +81 3 5521 8600

#### Europe/Middle East/Africa

Tel: +41 22 717 51 11



Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.